






Standards
NF C 96-315
MIL-DTL-39030

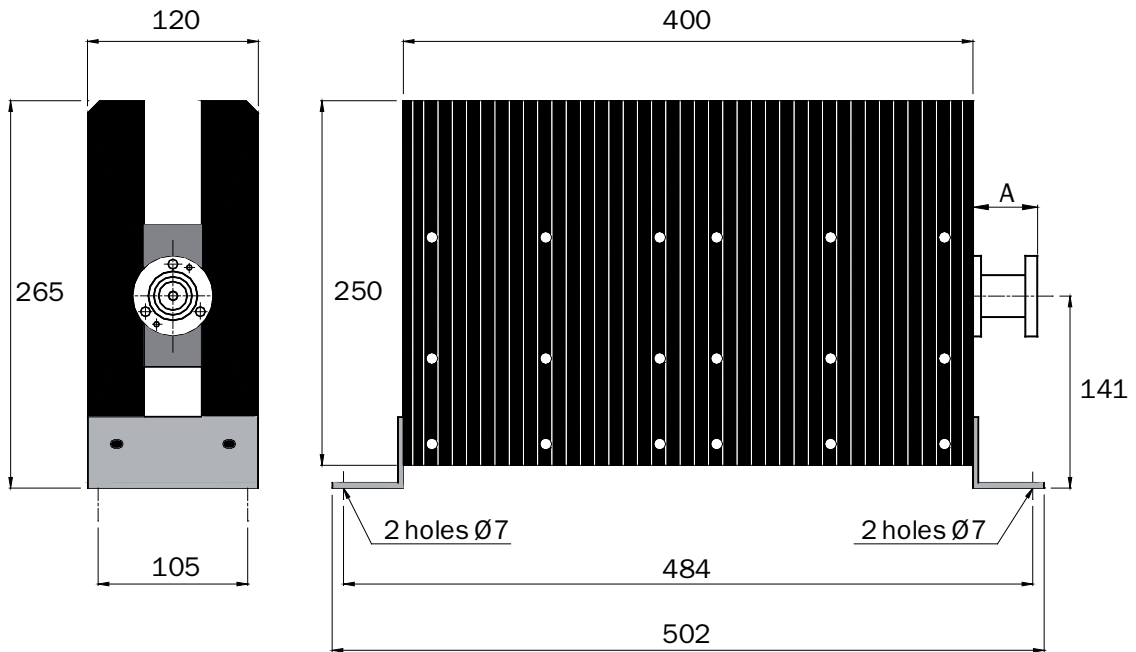

Impedance	50 Ω ± 5%
Frequency	DC - 1 GHz
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	1 kW
Peak power	40 kW
Weight	15 kg

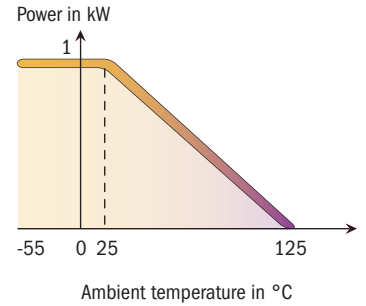

Dimensions in mm

P/N	Connector	A
17-4582	Nf	19
17-0251	7-16 f	22
17-0578*	7-16 f	22
17-0570**	7-16 f	22
17-4580	EIA 7/8 "	46

* with thermoswitch 90°C
** with thermoswitch 160°C

